




THERE CAN ONLY BE ONE!

THE UNRIVALLED TOOL FOR EASIER HANDLING OF CABLE REELS.

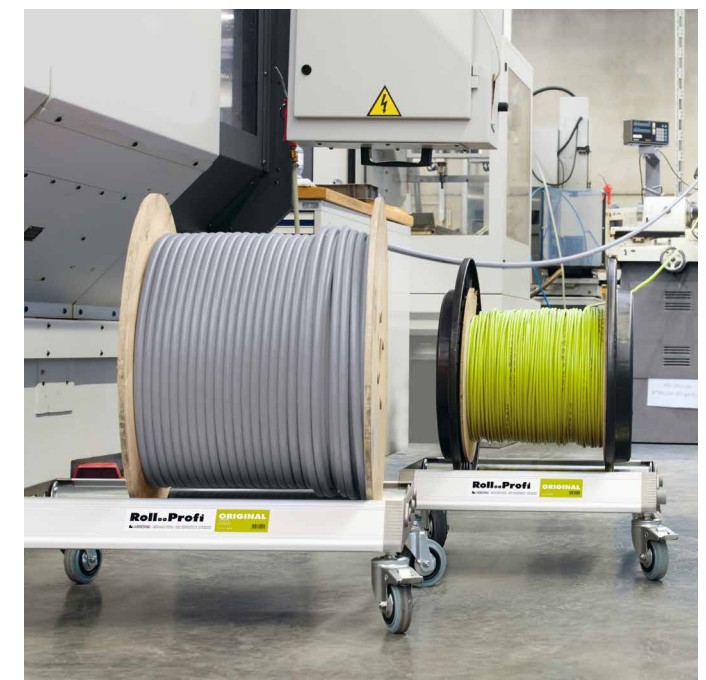

THE ORIGINAL – SINCE 1978.

For over 40 years, the ORIGINAL has been the craftsman's helper when unrolling cable reels. For daily use, we have designed a tool in solid pressure casting quality. Equipped with high-quality steel rollers, professionals across Europe know and appreciate the ORIGINAL from Herzebrock. Thanks to this quality known for decades, our ORIGINAL can withstand even the greatest strain in trade and industry.

The simple adjustment of the support rollers through the use of by using spring core axles at a distance allows enables unwinding cable reels of all sizes up to a maximum diameter of 1,200 mm. It goes without saying that our ORIGINAL offers maximum protection against dirt and corrosion because of the use of closed reel bearings that meet up to the high standards of our customers. Rubber feet guarantee perfect stability of the ORIGINAL and provide easy unwinding of particularly heavy reels.

The anti-slip reeling-on ramp of our ORIGINAL is unique. It prevents the cable reel from slipping off during winding up. The ergonomic design with burr-free, rounded edges promotes maximum safety to the operator. Our ORIGINAL has been known and appreciated for decades as a completely maintenance-free tool, re-gardless of whether our customers use it outdoors or in the workshop.

So it is the little things that make our ORIGINAL so unique – there can only be one!



VARIABLE

Simple adjustment of the support rollers using spring core axles.



AVAILABILITY

All parts are interchangeable and available at short notice.



STABLE

High-quality rubber feet ensure stability and are always available as spare parts.



PROFESSIONAL TIP

When using swivel castors, the rubber feet are screwed in at the side and stay where they belong. Also a good place for spare rubber feet.

Roll..Profi

ORIGINAL

THE ORIGINAL –
FOR CABLE REELS.



Roll..Profi

ORIGINAL XL

THE ORIGINAL –
IN LARGE.



Simply changing the position of the reel bearing rollers by using spring core axles at a distance allows unwinding cable reels of all sizes up to a maximum diameter of 1,200 mm. It goes without saying that our ORIGINAL offers maximum protection against dirt and corrosion because of the use of closed reel bearings.

Screwable rubber feet guarantee perfect stability of the ORIGINAL and provide easy unwinding of particularly heavy reels



TECHNICAL DATA	
Max. drum weight	200 kg
Max. drum Ø	1,200 mm
Max. reel width	670 mm
Dimensions (L x W x H)	530 x 710 x 100 mm
Weight	9.1 kg
ORDER CODE	
ORIGINAL XL	A90103
ACCESSORIES	
LENKROLLEN (set = 4 pcs.)	A90301



SPARE PARTS,
TECHNICAL DATA
AND MORE



IN USE



PROFESSIONAL TIPP

MORE ABOUT THE PRODUCT

TECHNICAL DATA	
Max. drum weight	200 kg
Max. drum Ø	1,200 mm
Max. reel width	520 mm
Dimensions (L x W x H)	530 x 550 x 100 mm
Weight	7.5 kg
ORDER CODE	
ORIGINAL	A90101
ACCESSORIES	
LENKROLLEN (set = 4 pcs.)	A90301



SPARE PARTS,
TECHNICAL DATA
AND MORE



IN USE



PROFESSIONAL TIPP

MORE ABOUT THE PRODUCT

Based on the ORIGINAL, the ORIGINAL XL offers the possibility of uncoiling cable reels up to a width of 670 mm. This tool is designed for daily use. Equipped with solid pressure casting and fitted with high quality steel rollers, the ORIGINAL XL withstands the highest strains found in industrial and warehouse environments.