



# NOSE ASSEMBLY DATA SHEET

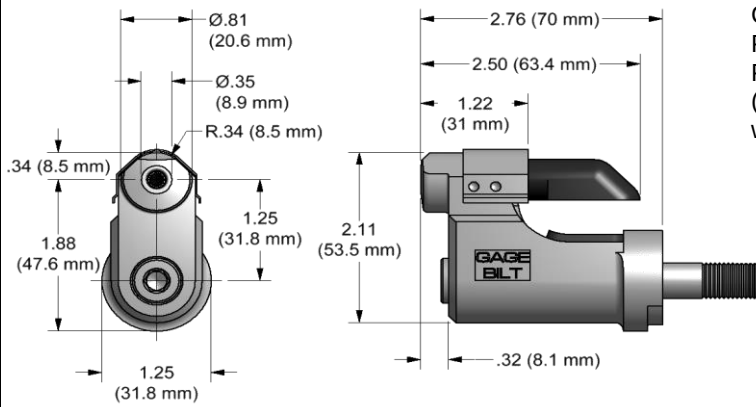

## CAUTION:

Pintail may eject forcibly. USE DEFLECTOR TO PREVENT SEVERE PERSONAL INJURY. Cap (8) use for closed access applications only or when clearance is an issue!

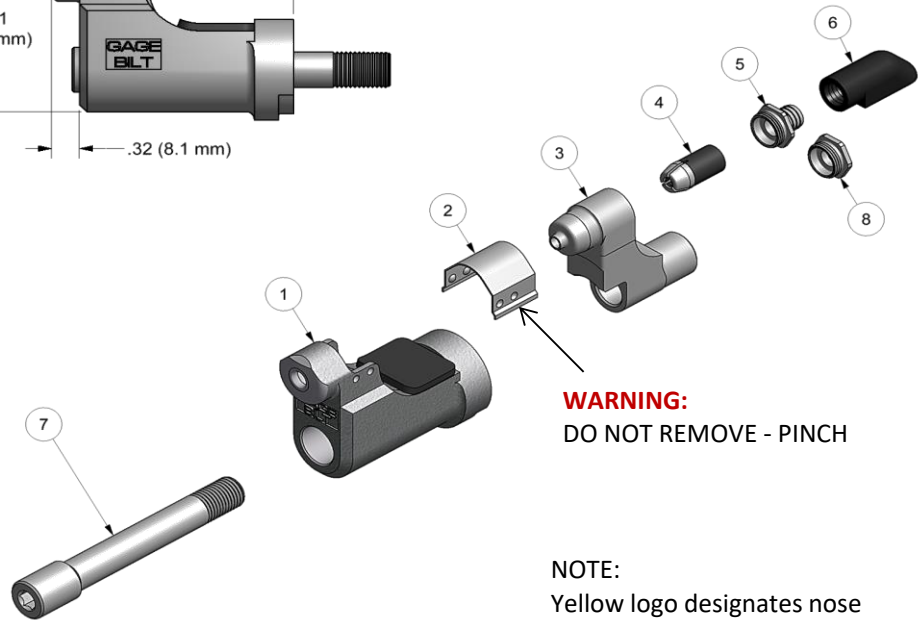

## ATTACHING NOSE ASSEMBLY TO TOOL:

1. Cycle tool to ensure piston is full forward.
2. Disconnect tool from power source.
3. Remove screw and stop from tool.
4. Apply Vibra-TITE® part no. 405124 to threads on drawbar.
5. With nose assembly complete assembled, hold collet full forward in anvil and thread drawbar into piston.
6. In approximately 2-3 turns, the anvil assy threads will also engage onto tool, continue to thread drawbar and anvil completely on tool.
7. Back-off assy, no more than 1/2 turn, to position notch on anvil allowing screw and stop to be reassembled onto tool.



REV 2/23

\*Use Adapter No. 751206.  
\*\*Use Adapter No. 353206.

**GAGE BILT**  
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA  
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505  
solutions1@gagebilt.com / www.gagebilt.com

| Type:                         |      | Fasteners:                                | Recommended Tool:<br>GB206-500(A)    |
|-------------------------------|------|-------------------------------------------|--------------------------------------|
| Non Self-Releasing<br>5/32" Ø |      | LGP® Lockbolt<br>ASNA2391-2<br>ASNA2392-2 | Alternate Tools:<br>*GB731 & **GB745 |
| Ref.<br>No.                   | Qty. | Description                               | LGP05-206G-300S                      |
| 1                             | 1    | Anvil Assy (Inc. 61108 Rubber Guard)      | 15537                                |
| 2                             | 1    | Guard                                     | 60426                                |
| 3                             | 1    | Collet                                    | 20576                                |
| 4                             | 1    | Super-Grip Jaw Assembly                   | 30543-S8                             |
| 5                             | 1    | Barbed Retainer                           | 70569                                |
| 6                             | 1    | Deflector                                 | 61107                                |
| 7                             | 1    | Drawbar                                   | 71141                                |
| 8                             | 1    | Cap                                       | 70571                                |