


NOSE ASSEMBLY DATA SHEET

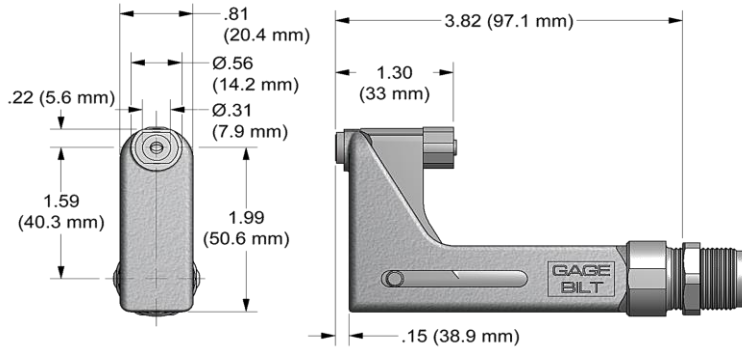


CAUTION:
Pintail may eject forcibly. Use for closed access applications only to prevent SEVERE PERSONAL INJURY!

Attachment:

Apply blue Loctite® 242 to anvil adapter (10) and adapter-collet (9) threads. Screw collet adapter (9) onto piston of tool. Screw anvil adapter (10) into nose fitting of tool. Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70104) against face of adapter (70347).

WARNING:
KEEP FINGERS AND HANDS AWAY FROM NOSE ASSEMBLY DURING OPERATION TO PREVENT SEVERE PERSONAL INJURY.

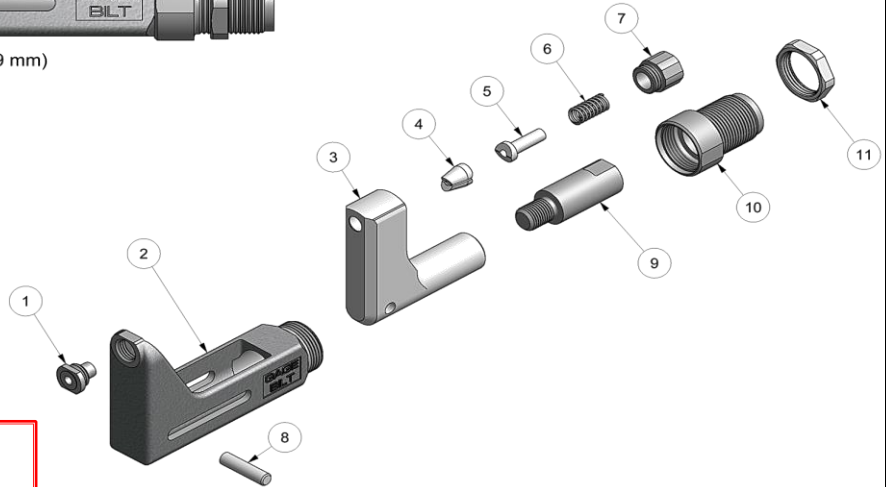

10/21 REV 10/25

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GB704
Self-Releasing 1/8", 5/32" & 3/16" Ø		CHERRYMAX®, CHERRYMAX® 'AB', MBC® LOCK CREATOR BACR15FR/FP, BACR15GF/GK,		
Ref. No.	Qty.	Description	456MAX-704B-400S	
1	1	Nose Tip	10425	
2	1	Anvil Holder	13536-2	
3	1	Collet	20915-1	
4	1	Jaw Set	30617	
5	1	Follower	40304-2	
6	1	Spring	A-1503	
7	1	Cap	60429	
8	1	Pin	70468	
9	1	Adapter-Collet	70473	
10	1	Anvil Adapter	70347	
11	1	Jam Nut	70104	

CHERRYMAX® AND MBC® ARE REGISTERED TRADEMARKS OF CHERRY AEROSPACE. LOCTITE® IS A REGISTERED TRADEMARK OF HENKEL CORPORATION.