

GB456A

INSTALLATION TOOL

GAGE BILT
I N N O V A T I V E
RIVET & LOCKBOLT TOOLS


44766 Centre Ct. Clinton Twp. MI 48038 USA

+1 586. 226.1500

+1 586. 226.1505

solutions@gagebilt.com

www.gagebilt.com

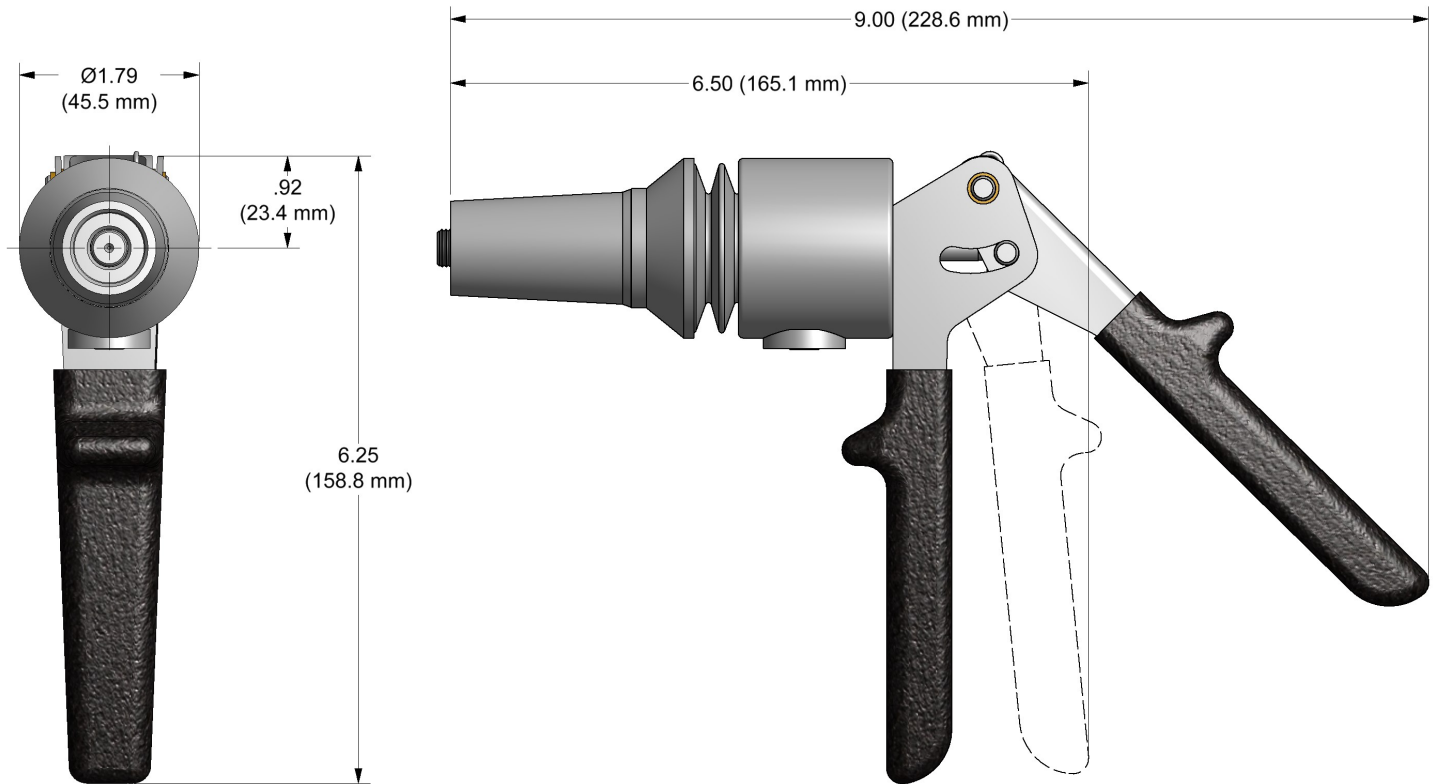

DESCRIPTION:

The GB456A is a hydraulic hand installation tool designed specifically for the most efficient installation of all 1/8", 5/32", 3/16" and 1/4" $\varnothing$ Cherrymax®, Allmax®, & Huckmax® fasteners. It weighs 20oz. (.57 kg) and is 6-1/4" high x 6" long x 1-3/4" wide without a nose assembly. The GB456A has a .565" (14.35 mm) minimum stroke and a rated pull load of 3,500 lbs. (15.57 kN).

Gage Bilt Powermax nose assemblies, part numbers 456MAX-701-17, 456MAX-704-35, 456MAX-749-35, 456MAX-704-54RA & 456MAX-704-43OS, fit directly on this tool: See Nose Assembly Selection Chart for other applications.





GB456A ACCESSORIES

Approved for use on Gage Bilt CE installation tools and/or other manufacturer's CE approved tools of similar design.
(Sold Separately)



NOSE ASSEMBLY SELECTION CHART

FASTENER	DIA.	STRAIGHT	RIGHT ANGLE	OFFSET
CHERRYMAX®, CHERRYMAX® 'AB', MBC® LOCK CREATOR BACR15FR/FP, BACR15GF/GK	1/8 5/32 3/16	456MAX-701-17 ⁽¹⁾ 456MAX-704-35 ⁽¹⁾ 456MAX-749-35 ^(1,3)	456MAX-704-54RA ^(1,2)	456MAX-704-43OS ⁽¹⁾
NUT PLATE RIVETS MS20600 SERIES CCR244/264/274 MS/9SP/PT BACR15CC/CF/DA/DR	3/32 1/8 5/32 3/16	3C-715B-43 ⁽⁴⁾ 4C-715B-43 ⁽⁴⁾ 5C-715B-43 ⁽⁴⁾ 6C-715B-43 ⁽⁴⁾	3C-704-54RA ⁽²⁾ 4C-704-54RA ⁽²⁾ 5C-704-54RA ⁽²⁾ 6C-704-54RA ⁽²⁾	3C-704A-40OS 4C-704A-40OS 5C-704A-40OS 6C-704A-40OS
"A" CODE NAS1398A, NAS1399A NAS1738A, NAS1739A	3/32 1/8 5/32 3/16	3A-715B-43 ⁽⁴⁾ 4A-715B-43 ⁽⁴⁾ 5A-715B-43 ⁽⁴⁾ 6A-715B-43 ⁽⁴⁾	3A-704-54RA ⁽²⁾ 4A-704-54RA ⁽²⁾ 5A-704-54RA ⁽²⁾ 6A-704-54RA ⁽²⁾	3A-704A-40OS 4A-704A-40OS 5A-704A-40OS 6A-704A-40OS
GROUND STUD M83454 & BACS53B	8/32 10/32	GS8-715B-43 ⁽⁴⁾ GS10-715B-43 ⁽⁴⁾		

CHERRYMAX® AND MBC® ARE REGISTERED TRADEMARKS OF CHERRY AEROSPACE FASTENERS.

GAGE BILT CERTIFIES THE GB456A WILL INSTALL THE ABOVE FASTENERS

1) INSTALLS 1/8", 5/32" AND 3/16" DIAMETERS.

2) RIGHT ANGLE NOSE ASSEMBLIES MAY REQUIRE MORE THAN ONE PULL.


3) FRONT END EJECTING NOSE ASSEMBLY.

4) REQUIRES 704001 ADAPTER.


NOTE: THE LAST 2 DIGITS OF THE NOSE ASSEMBLY REPRESENTS THE LENGTH THE NOSE
EXTENDS FROM THE TOOL I.E. -20 = 2.0 INCHES

REV 5/26


Right Angle

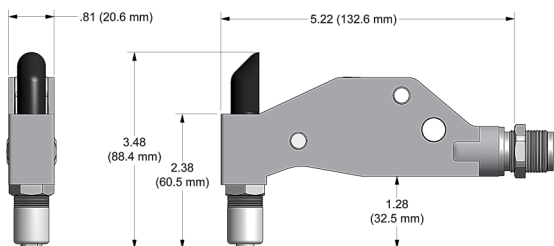

Straight

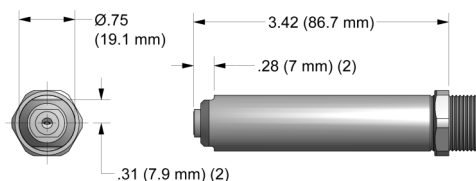

Offset

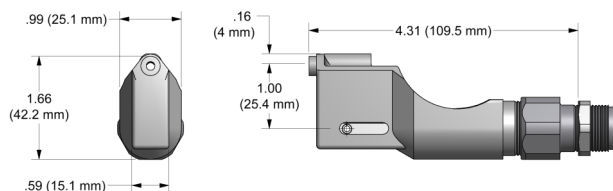

Riveter Kits Available

Contact Gage Bilt for more information.

