

GB730

PNEUDRAULIC INSTALLATION TOOL

GAGE BILT

RIVET & LOCKBOLT TOOLS

44766 Centre Ct. Clinton Twp. MI 48038 USA


+1 586. 226.1500

+1 586. 226.1505

solutions@gagebilt.com

www.gagebilt.com

GB730
Stroke - .500" (12.7 mm)
Hand held weight - 4.70 lbs. (2.13 kg)
Pull load - 4,000 (17.79 kN)

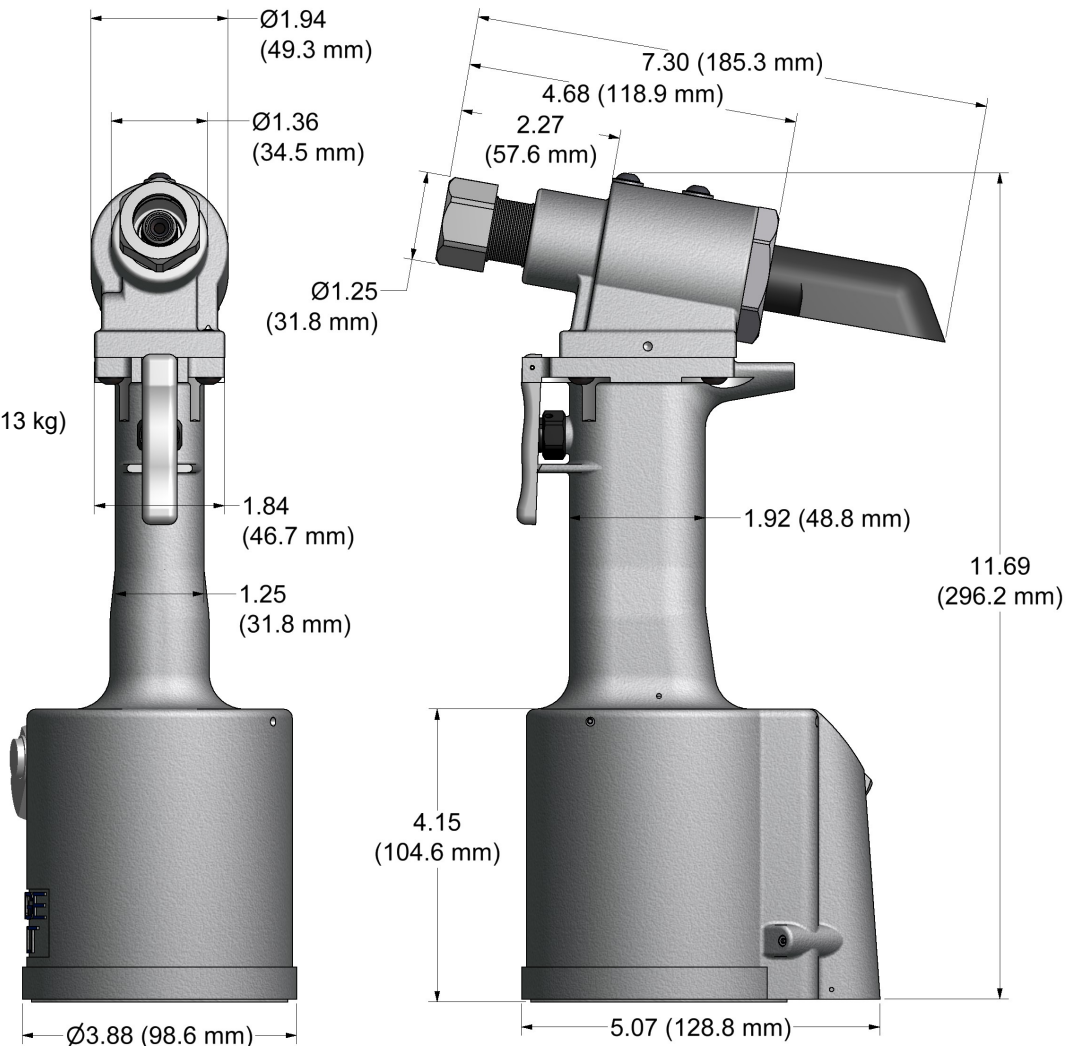

The **GB730** is a pneumatic-hydraulic installation tool designed specifically for the efficient installation of blind rivets and lockbolts. It can be operated in any position and have a rated pull load of 4,000 (17.79 kN) pounds with 90 psi (6.2 bar) air pressure at the air inlet.

The **GB730** installation tool operates on 90 to 100 psi. (6.2-6.9 bar) of air pressure, with 90 psi. (6.2 bar) providing the maximum efficiency. At 90 psi. (6.2 bar) of air pressure, the **GB730** series does not exceed 81.5 dB(A) and consumes .16 SCF/cycle (4.53 L/cycle). The air inlet is provided with 1/4 - 18 female pipe thread to accept the users air hose fitting.

**NOSE ASSEMBLIES ARE NOT FURNISHED WITH
TOOL AND MUST BE ORDERED SEPARATELY**



