


NOSE ASSEMBLY DATA SHEET

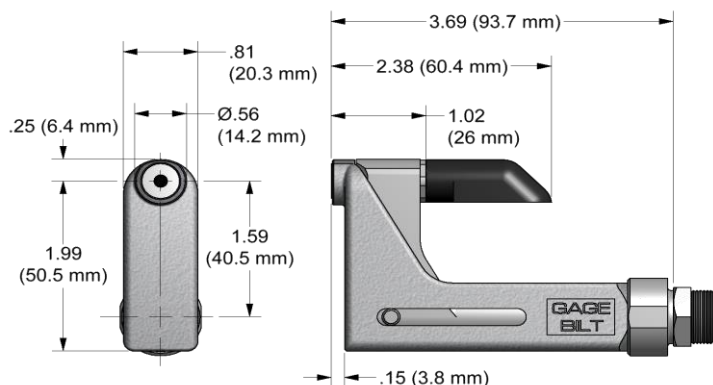

CAUTION:

Do not operate if pintail deflector is removed. Pintail may eject forcibly. SEVERE PERSONAL INJURY MAY RESULT.


WARNING:

KEEP FINGERS AND HANDS AWAY FROM NOSE ASSEMBLY DURING OPERATION TO PREVENT SEVERE PERSONAL INJURY.

Attachment

Apply Vibra-tite® p/n/ 405125 to all threads and allow it to set 20 minutes prior to assembly.

Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70411) against face of tool.

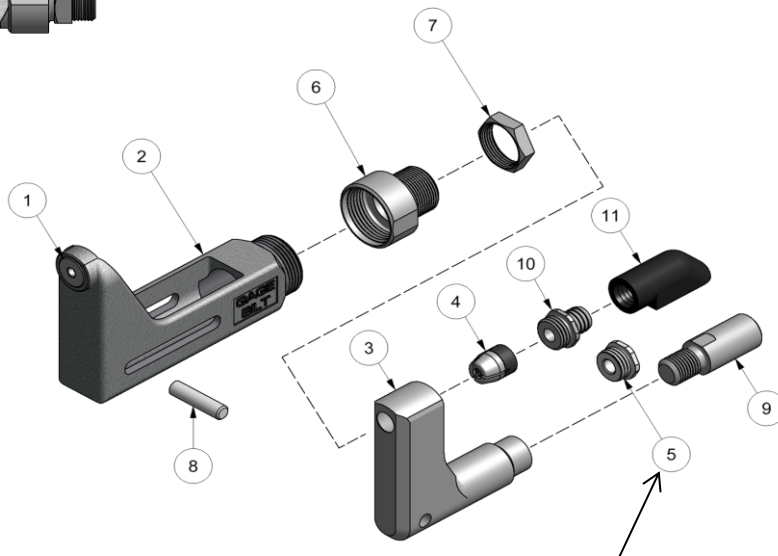

Cap (5) is used for closed access applications only or when clearance is an issue.

11/23 REV 10/25



GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool: GB704
Non Self-Releasing 5/32" Ø		MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U MAXI-BOLT®, BACB30YY, YU, & YT, CR7000 SERIES BLIND BOLT (SINGLE ACTION) WITH DRIVE WASHER	
Ref. No.	Qty.	Description	UBB05-715A-400S
1	1	Anvil-Driving	15598
2	1	Anvil & Holder Assembly	12044
3	1	Collet	20911
4	1	Super-Grip Jaw Assembly	30544-S3
5	1	Cap	60428
6	1	Anvil Adapter	70346
7	1	Jam Nut	70411
8	1	Roll Pin	70468
9	1	Collet Adapter	70340
10	1	Barbed Retainer	60440
11	1	Deflector	61107

MAXI-BOLT® IS A REGISTERED TRADEMARK OF CHERRY AEROSPACE FASTENERS. VIBRA-TITE® IS A REGISTERED TRADEMARK OF OAKLAND CORPORATION.