



NOSE ASSEMBLY DATA SHEET

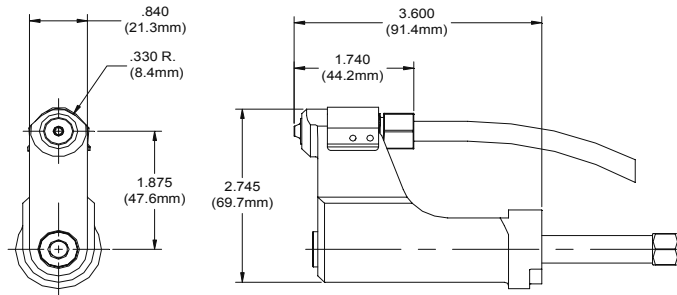

CAUTION:

Pintail may eject forcibly. Use for closed access applications only to prevent SEVERE PERSONAL INJURY!

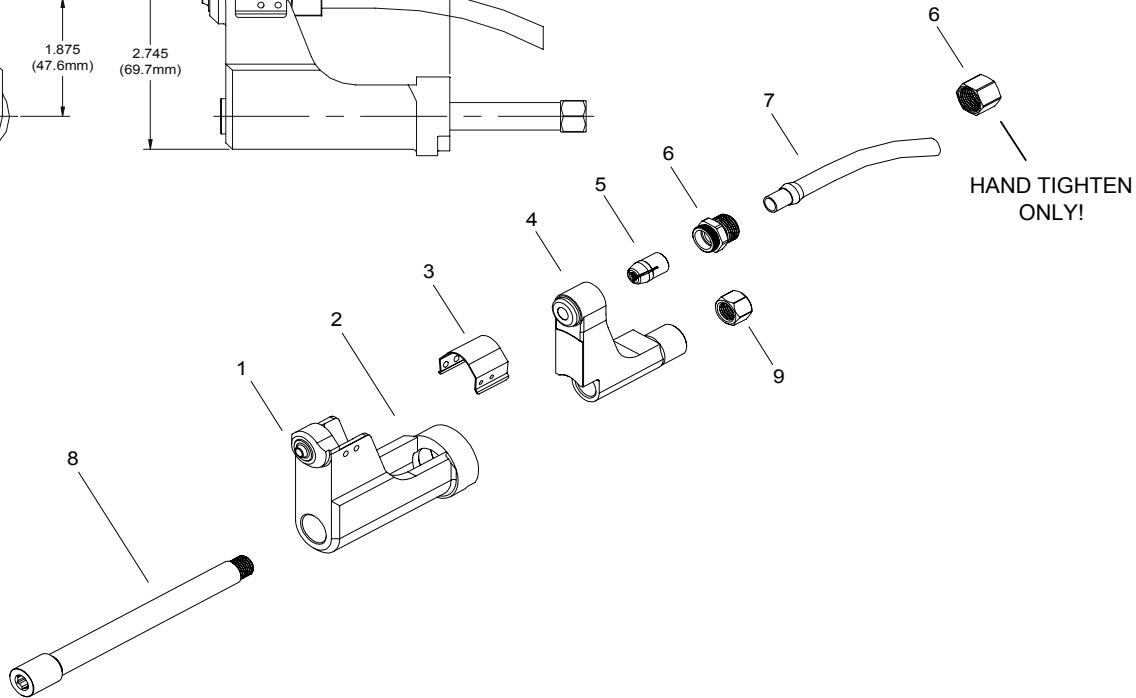

ASSEMBLY INSTRUCTIONS:

On front of GBP204 Installation Tool remove screw and stop. With collet placed in anvil, install on tool. Slide drawbar thru anvil and collet. Screw nut on rear of draw bar. Screw draw bar into piston until it stops. Replace screw and stop on tool.



6/10

Covered under Patent No. 5,371,933

*Use Adapter No. 751204 (-8 aluminum only).

**Use Adapter No. 353204.

***Use Adapter No. 751204 with 713152 stroke limiter.

GAGE BILT
MADE IN U.S.A.

GAGE BILT PRODUCTS CORP.

44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool:	
Non Self-Releasing 5/32", 3/16" & 1/4" Ø		MS90353S & U, MS90354S & U MS21140S & U, MS21141S & U CR7000 SERIES, BACB30YY, YU, & YT		GBP204	
				Alternate Tools: *GBP752F, **GBP745D & ***GBP713D	
Ref. No.	Qty.	Description	SB05-204C-37OT	SB06-204C-37OT	SB08-204C-37OT
1	1	Anvil Insert	10562	10683	10867
2	1	Anvil Assembly (Inc. #1)	19902	19903	19904
3	1	Guard	60426	60426	60426
4	1	Collet	20723	20723	20723
5	1	Super-Grip Jaw Assembly	30545-S2	30655-S2	30863-S2
6	1	Cap Assembly	70560	70560	70560
7	1	Deflector Tube Assembly	61104	61104	61104
8	1	Drawbar	71117	71117	71117
9	1	Nut	71114	71114	71114