



NOSE ASSEMBLY DATA SHEET

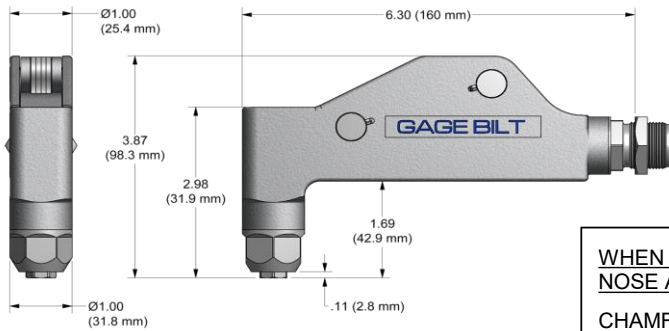

WHEN ASSEMBLING TO NOSE ASSY:
CHAMFERS ON PART MUST BE FACING DOWN

WHEN MOUNTING ON RIVETER:
Press & Hold in direction shown.

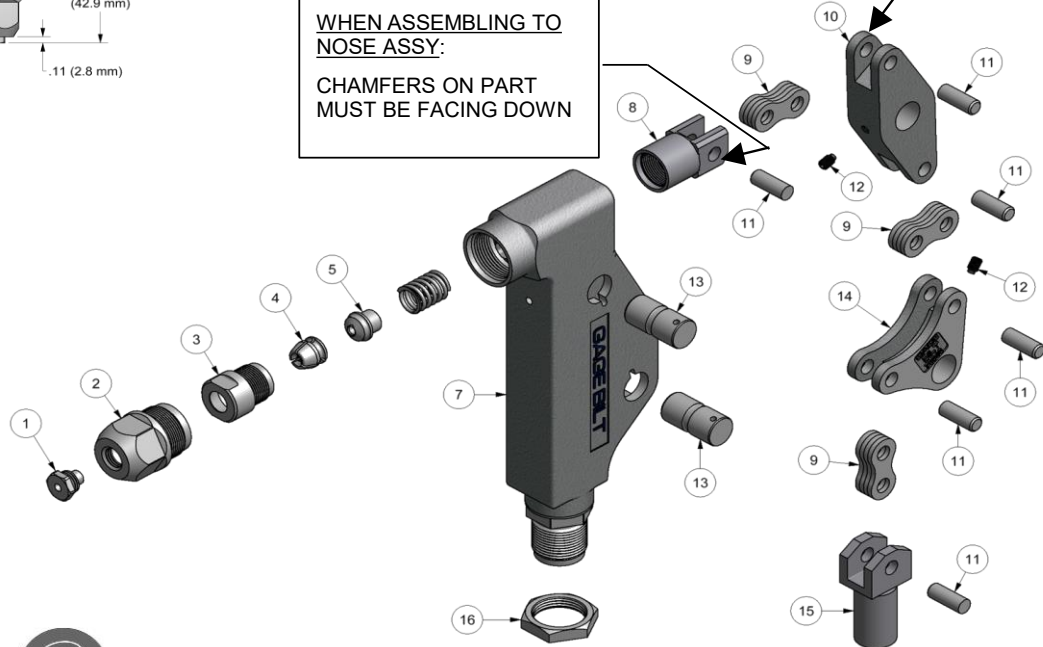

10/21 REV 10/25

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

MOUNTING INSTRUCTIONS:

Apply Vibra-tite® p/n/ 405125 to all threads and allow it to set 20 minutes prior to assembly.

Attach riveter to air source for correct piston positioning. Push the drawbolt assembly forward (see above), before mounting. While holding drawbolt in a forward position, thread the nose assembly onto the riveter, making sure that both internal and external threads are connected. Use the jam-nut to lock the pulling head in position. Cycle the tool to make sure it is functional.

DISASSEMBLY AND ASSEMBLY:

Disassembly:

Loosen and remove holder (2) from frame assy (7). Unscrew collet (3) which contains jaws (4), follower (5) and spring (6) from collet bolt (8).

Remove 2 set screws (12) and push out 2 pivot pins (13) to permit removal of linkage. Remove link pin (11) from Collet bolt (8) and links (9) to disengage from lever (10).

Remove 5 link pins (11) to disassemble lever (10), links (9), bell crank (14) and drawbolt (15).

Reassembly:

Reverse the procedure. Linkage, consisting of lever (10), links (9), bell crank (14) and drawbolt (15) should be assembled as a subassembly before inserting lever (10) into collet bolt (8). Apply Vibra-TITE® to set screws. **MAKE SURE NOTCHES ON COLLET BOLT (8) ARE POINTING TOWARDS LEVER (10).** This complete subassembly may then be inserted into frame (7) and retained by pivot pins (13).

Type:		Fasteners:	Recommended Tool:
Single Action Self-Releasing 5/32" Ø		MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U MAXI-BOLT®, BACB30YY, YU, & YT, CR7000 SERIES BLIND BOLT (SINGLE ACTION) WITH DRIVE WASHER	
Ref. No.	Qty.	Description	UBB05-744-58RA
1	1	Nose Tip	15008
2	1	Holder	13424-1
3	1	Collet	28830
4	1	Chuck Jaw	30502-1
5	1	Follower	40311-6
6	1	Spring	A-1603
7	1	Frame Assembly	70840
8	1	Collet Bolt	70839
9	12	Link	70841
10	1	Lever	70843
11	6	Link Pin	70842
12	2	Set Screw	70844
13	2	Pivot Pin Assembly	70845
14	1	Bell Crank	70846
15	1	Drawbolt	70847
16	1	Jam Nut	70821