



NOSE ASSEMBLY DATA SHEET

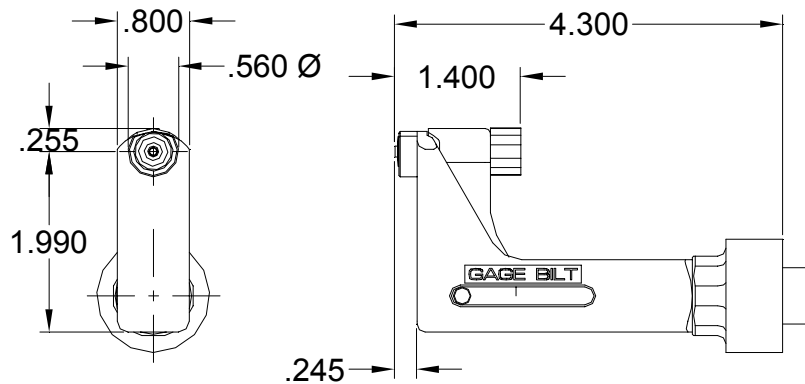

Attachment:

Screw on jam nut (70336) onto nose fitting of tool at least 3/4". Screw nose assembly onto nose fitting of tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70336) against adapter (70331).

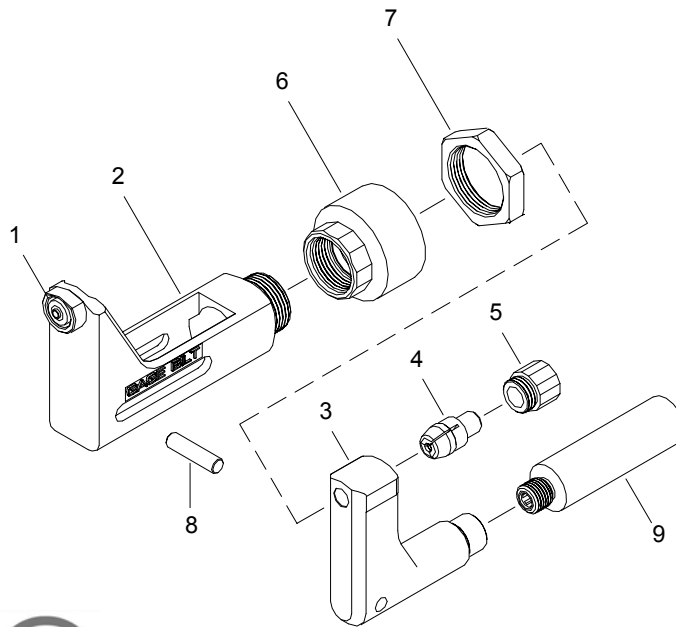

Rev. 9/05



*1/4" aluminum only

GAGE BILT

GAGE BILT PRODUCTS CORP.

14500 Barber Drive (586) 771-7664
Warren, Mi 48088 (586) 771-2665 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GBP751C		
Non Self-Releasing 1/8", 5/32", 3/16" & 1/4" Ø		NAS1919S NAS1921S		Alternate Tools: GBP752E, GBP713C & GBP2400B		
Ref. No.	Qty.	Description	BR4- 751-430S	BR5- 751-430S	BR6- 751-430S	*BR8- 751-430S
1	1	Anvil Insert	10426	10563	10684	10868
2	1	Anvil & Holder Assembly (Inc. #1)	13357	13358	13359	13360
3	1	Collet	20911	20911	20911	20911
4	1	Super-Grip Jaw Assembly	30425-S2	30545-S4	30656-S3	30864-S5
5	1	Cap	60429	60429	60429	60429
6	1	Anvil Adapter	70331	70331	70331	70331
7	1	Jam Nut	70336	70336	70336	70336
8	1	Pin	A-944	A-944	A-944	A-944
9	1	Collet Adapter	70332	70332	70332	70332