


NOSE ASSEMBLY DATA SHEET

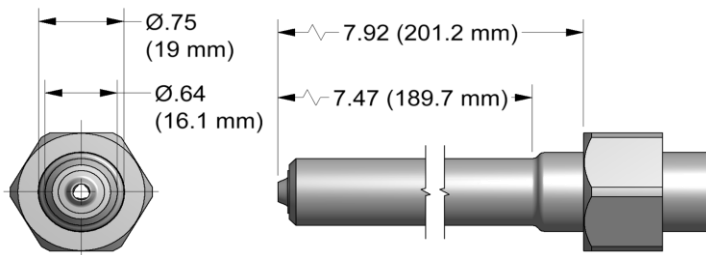


ASSEMBLY:

Notes:

- Apply Vibra-tite® p/n/ 405125 to all threads and allow it to set 20 minutes prior to assembly.
- Tighten collet (3) and assembled extension-collets (5 & 6) to 80-100 IN-LBS. (.36 - .44 Kn) torque.
- If nose assy is assembled as it is when purchased new, follow steps 3-5 to attach to tool.
 - Thread extension-collet (5) to extension-collet (6) and tighten using flats provided.
 - Place jaws (4) into rear of collar (3). Thread collet (3) to assembled extension-collets (5 & 6) by hand then tighten using flats provided per "B" above.
 - Thread assembled collet (3) and assembled extension-collets (5 & 6) onto piston of tool using flats provided and hex in rear of piston.
 - Slide anvil & holder assembly (2) over collet (3).
 - Slide retaining nut on anvil and tighten nose assembly to tool. (Note: retaining nut stop not used with this nose assembly).

DISASSEMBLY:

Reverse assembly instructions.

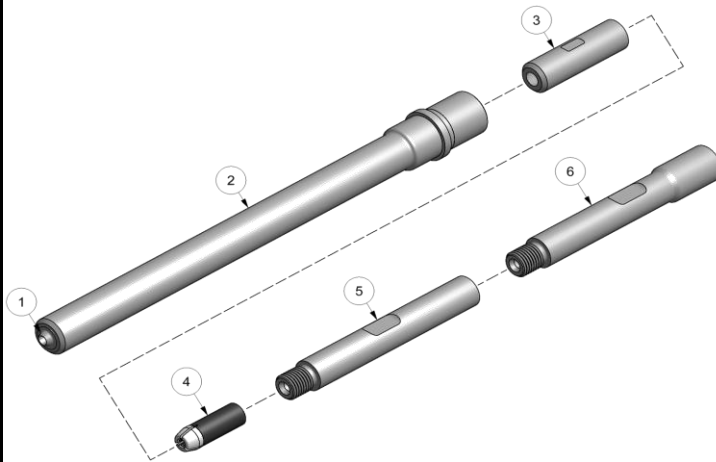

Rev. 11/25

*Anvil Assembly includes 35208 retainer.

**RECOMMENDED FOR MAINTENANCE APPLICATIONS ONLY.

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool: GB722
Non Self-Releasing 3/16" Ø		MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U MAXIBOLT®, BACB30YY, YU, & YT CR7000 SERIES BLIND BOLT (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER	Alternate Tools: GB713 & GB2480(A)
Ref. No.	Qty.	Description	SB06-752B-80
1	1	Anvil-Driving	16024
2	1	*Anvil & Holder Assembly	13320
3	1	Collet	20717
4	1	Super-Grip Jaw Assembly	30655-S
5	1	Extension-Collet	70461
6	1	Extension-Collet	70551

MAXI-BOLT® IS A REGISTERED TRADEMARK OF CHERRY AEROSPACE FASTENERS. VIBRA-TITE® IS A REGISTERED TRADEMARK OF OAKLAND CORPORATION.