


NOSE ASSEMBLY DATA SHEET

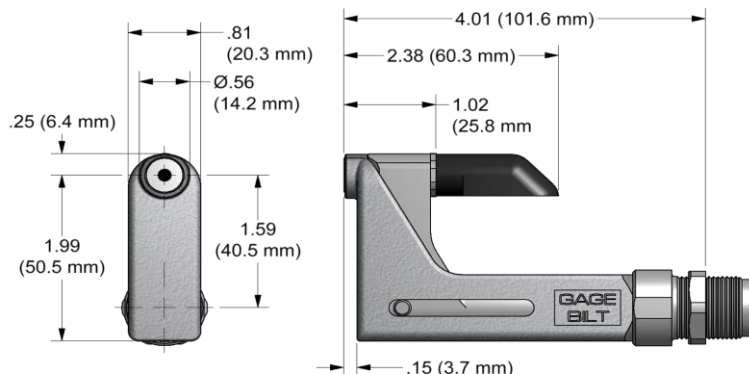

CAUTION:


Do not operate if pintail deflector is removed. Pintail may eject forcibly. SEVERE PERSONAL INJURY MAY RESULT.

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE
PERSONAL INJURY.

Attachment

Apply Vibra-tite® p/n/ 405125 to all threads and allow it to set 20 minutes prior to assembly.

Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70104) against face of tool.

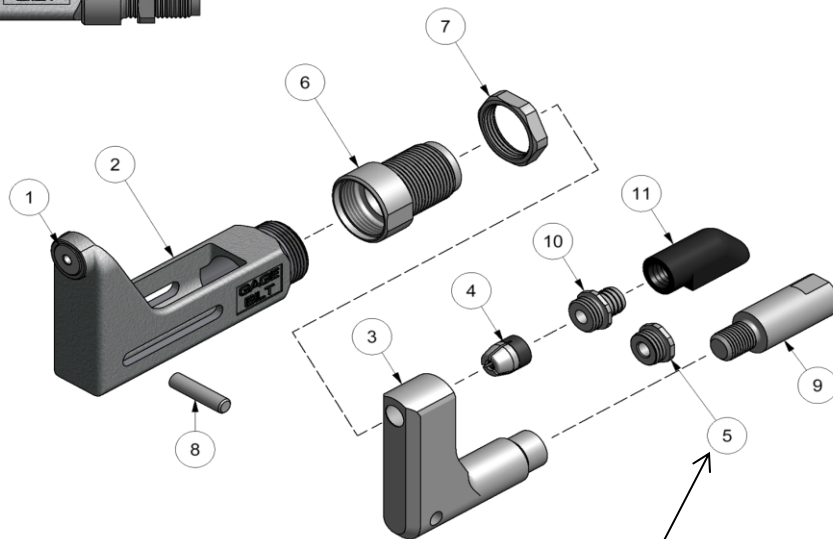

Cap (5) is used for closed access applications only or when clearance is an issue.

11/21 REV 10/25



GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GB704
Non Self-Releasing 5/32" Ø		MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U MAXI-BOLT®, BACB30YY, YU, & YT, CR7000 SERIES BLIND BOLT (SINGLE ACTION) WITH DRIVE WASHER		
Ref. No.	Qty.	Description		UBB05-704-400S
1	1	Anvil-Driving		15598
2	1	Anvil & Holder Assembly		12044
3	1	Collet		20911
4	1	Super-Grip Jaw Assembly		30544-S3
5	1	Cap		60428
6	1	Anvil Adapter		70347
7	1	Jam Nut		70104
8	1	Roll Pin		70468
9	1	Collet Adapter		70473
10	1	Barbed Retainer		60440
11	1	Deflector		61107

MAXI-BOLT® IS A REGISTERED TRADEMARK OF CHERRY AEROSPACE FASTENERS. VIBRA-TITE® IS A REGISTERED TRADEMARK OF OAKLAND CORPORATION.